



工程指示 / 要求簡箋(E.I.)

工程指示編號：EI / 2841 / 20 修改版次：  
 工程編號：J-837 工程名稱：官塘 裕民坊(平台)  
 工程項目：3/F GLASS WALL 後加通道門 配件  
 收件人：林哥 發件人：大明 日期：17/12/2020

□要求提供 / □確認 事項：

- |                                    |                                     |                               |
|------------------------------------|-------------------------------------|-------------------------------|
| <input type="checkbox"/> 初步鋁料 B.M. | <input type="checkbox"/> 加工拆圖，然後生產  | <input type="checkbox"/> 尺寸表  |
| <input type="checkbox"/> 正式鋁料 B.M. | <input type="checkbox"/> 技術上資料 / 指示 | <input type="checkbox"/> 報價   |
| <input type="checkbox"/> 配件 B.M.   | <input type="checkbox"/> 樣辦或貨品說明書   | <input type="checkbox"/> 分判合約 |
| <input type="checkbox"/> 其他：_____  |                                     |                               |

內容：

煩請依附件資料訂購 'GCC' 55128L 門鎖 -5 套,  
 'Dorma' 8066 -5 套,  
 'Dorma' 7421 -5 套,

送回廠加工.

28/12/2020

請在 \_\_\_\_\_ 前完成上列要求。

附有關圖紙 / 文件：BM 表 頁, 圖紙 頁

以上項目為：

原合約工程包  原合約工程加 / 減賬  新工程報價

原因：-

分發東莞各部門：

( ) 生產技術總監  連附件 ( ) 技術部  連附件 ( ) 生產部  連附件 ( ) 機械設計部  連附件  
 ( ) 採購部  連附件 ( ) 生產統籌部  連附件 梅  
 ( ) 質檢部  連附件 ( ) 會計部  連附件 ( ) 報關組  連附件 ( ) 其他 \_\_\_\_\_  連附件

分發香港各部門：

( ) 行政部  連附件 ( ) 會計部  連附件 ( ) 統籌部  連附件 ( ) 工程部地盤科文  連附件 黎明  
 ( ) 採購部  連附件 ( ) QS 部  連附件 ( ) 維修部  連附件 ( ) 其他 \_\_\_\_\_  連附件

傳遞編號：HK 2890


發件人簽署：

項目經理簽署：

(FTP)

# GCC<sup>®</sup> Door Hardware

## 55128L DEADLOCK "LONG THROW"




- Cylinder backset available: 31/32", 7/8", 1-1/8", and 1-1/2".
- Bolt 1-3/8" throw, made of 5 ply laminated steel with hardened roller pin in center to resist hacksaw attacks.
- Lock accepts standard 1-5/32" mortise key or thumbturn cylinders.
- 1" x 6-7/8" faceplates.

Faceplate Type	
55128L/1	
55128L/2	
55128L/3	
55128L/4	
55128L/5	

Faceplate finishes:  
 AL - Anodized Satin Aluminum  
 DU - Anodized Bronze  
 BK - Anodized Black

## 55128S DEADLOCK "SHORT THROW" 55128H DEADLOCK "HOOK BOLT"

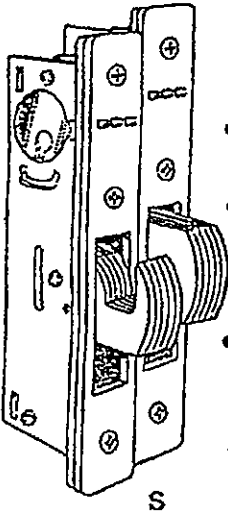


- Cylinder backset available: 31/32", 1-1/8", 7/8" and 1-1/2".
- Bolt 13/16" throw, made of 5 ply laminated steel with hardened roller pin in center to resist hacksaw attacks.
- Lock accepts standard 1-5/32" mortise key or thumbturn cylinders.
- 1" X 6-7/8" faceplates.

Faceplate Type	
55128(S or H)/1	
55128(S or H)/2	
55128(S or H)/3	
55128(S or H)/4	
55128(S or H)/5	

Faceplate finishes:  
 AL - Anodized Satin Aluminum  
 DU - Anodized Bronze  
 BK - Anodized Black

## 55129 DEADLATCH LOCK

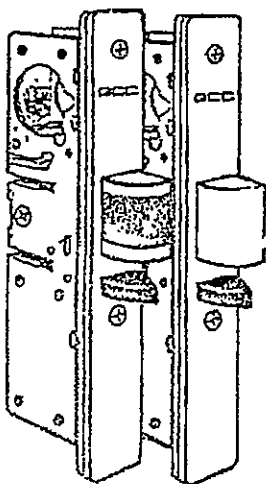

- Cylinder backset 1-1/8".
- Field reversible for opposite hand.
- Key controlled dogging.
- Latchbolt 1/2" throw with Delrin insert for smooth, quiet latching(A) or w/o Delrin insert(B).
- Lock accepts standard 1-5/32" mortise key or thumbturn cylinders.
- Strike included, US 26D.
- 1" X 6-7/8" faceplates.


Faceplate Type	
55129/1	
55129/2	
55129/3	
55129/4	
55129/5	

Faceplate finishes:  
 AL - Anodized Satin Aluminum  
 DU - Anodized Bronze  
 BK - Anodized Black

(A) (B)

# GCC<sup>®</sup> Door Hardware

## LH-560 LEVER HANDLE

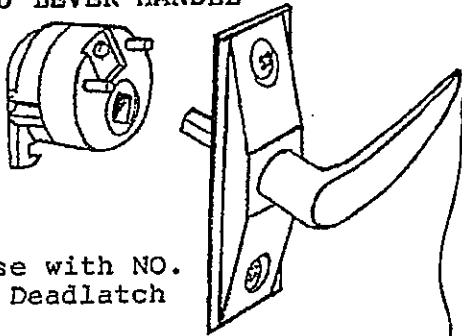

\*For use with NO. 55129 Deadlatch Lock.


\*Cam plug non-handed reversible in the field.

\*Finishes available:

- AL - Baked Satin Aluminum Paint
- DU - Baked Storefront Bronze Paint
- BK - Baked Black Paint

## MORTISE KEY CYLINDER

ZC-101 (ZINC)  
BS-102 (SOLID BRASS)



\*1-5/32" 5 pin cylinder.

\*For use with Deadlock or Deadlatch Lock.

\*Core face and Key US 26D.


\*Cylinder ring 3/16" standard, 5/32" and 7/32" optional.

\*Keyway available: Schlage "C", Yale "8".

\*Finishes available:

- AL - Anodized Satin Aluminum
- DU - Anodized Bronze
- BK - Anodized Black
- PC - Polish Chrome (for BS-102 only)

## PH-520 LATCH PADDLE HANDLE

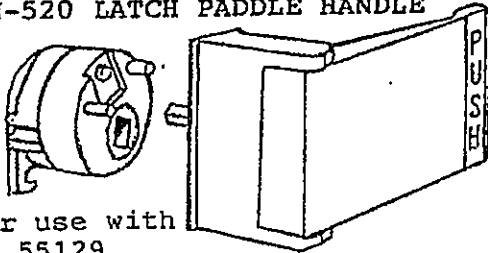

\*For use with NO. 55129 Deadlatch Lock.

\*Cam on cam plug is handed and can be reversed.


\*Operation: PSL-Push To Left  
PSR-Push To Right  
PLL-Pull To Left  
PLR-Pull To Right

\*Finish available:

- AL - Anodized Satin Aluminum
- DU - Anodized Bronze
- BK - Anodized Black

## MORTISE THUMBTURN CYLINDER

ZC-101T (ZINC)  
BS-102T (SOLID BRASS)



\*1-5/32" mortise cylinder.


\*For use with Deadlock or Deadlatch Lock.

\*Thumbturn US 26D.


\*Cylinder ring 3/16" standard, 5/32" and 7/32" optional.

\*Finishes available:

- AL - Anodized Satin Aluminum
- DU - Anodized Bronze
- BK - Anodized Black
- PC - Polish Chrome (for BS-102T only)

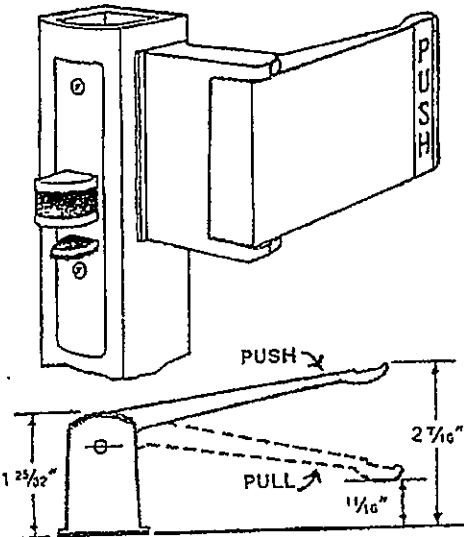

## 9125 DOUBLE ENDED EUROPROFILE MORTISE CYLINDER (CD-88)



\*Length 2-15/32" (62mm) standard.

\*For use with Patch Lock NO. GL-50, GL-34 or use with Deadlock NO. 55128L, 55128S, 55128H backset 1" (25mm) or 1-3/16" (30mm).

\*Keyway available: Schlage "C" or Yale "8".

\*Finish available:

- PC - Polish Chrome
- PB - Polish Brass
- SC - Satin Chrome

