



工程指示 / 要求簡箋(E.I.)

工程指示編號：EI / 1945 / 20

修改版次：B

工程編號：J - 852

工程名稱：亞皆老街中電

工程項目：幕牆 地盤用預埋碼 (標準層 2-23/F) Hilti Channel (T Bolt)

收件人：MAGGIE

發件人：Ant Yeung

日期：28/10/2020

要求提供 / 確認 事項：

- | | | |
|------------------------------------|-------------------------------------|-------------------------------|
| <input type="checkbox"/> 初步鋁料 B.M. | <input type="checkbox"/> 加工拆圖，然後生產 | <input type="checkbox"/> 尺寸表 |
| <input type="checkbox"/> 正式鋁料 B.M. | <input type="checkbox"/> 技術上資料 / 指示 | <input type="checkbox"/> 報價 |
| <input type="checkbox"/> 配件 B.M. | <input type="checkbox"/> 樣辦或貨品說明書 | <input type="checkbox"/> 分判合約 |
| <input type="checkbox"/> 其他：_____ | | |

內容：

B 版：放行一半用量 T Bolt M16 長度用 60mm，

地盆：餘下一半再待石矢覆尺報告放行

請 訂購 幕牆用預埋碼 J852-EM01 Hilti Channel (HAC50) (標準層用)

請在 2020. 11. 18 前完成上列要求。

附：1 頁

以上項目為：

- 原合約工程包 原合約工程加 / 減賬 新工程報價

原因：-

分發東莞各部門：

- () 生產技術總監 連附件 () 技術部 連附件 () 生產部 連附件 () 機械設計部 連附件
 () 採購部 連附件 () 生產統籌部 連附件
 () 質檢部 連附件 () 會計部 連附件 () 報關組 連附件 () 其他 _____ 連附件

分發香港各部門：

- () 行政部 連附件 () 會計部 連附件 () 統籌部 連附件 () 工程部地盤科文 連附件 祥哥
 () 採購部 連附件 () QS 部 連附件 () 維修部 連附件 () 其他 _____ 連附件

傳遞編號：

發件人簽署： 

項目經理簽署： 

美特鋁質有限公司

MIDI Aluminium Fabricator Ltd.

工程號: J-852

地盤名稱: 亞皆老街中電

計算:

核對:

日期:

日期: 2020/10/28

送呈:

副本:

地盤用預埋碼B.M.表

項目類別: CW用預埋碼



按CW

BM編號: 852

總重量 (Kg): 352

序號	修改標示	物料編號	鐵件名稱	顏色	數量 (支)			重量 (Kgs)		備注
					實用	後備	總數	Kg/件	總重量	
1		EM01	Hilti Channel HAC - 50 106/350F	Hilti	180	10	190	1.85	351.5	
2	B放行先訂1半	Hilti HBC-C	T Bolt M16 Grade 8.8	長=60mm	360	20	380			
3										
4										
5										
6										
7										
8										

HBC-C T-head bolt

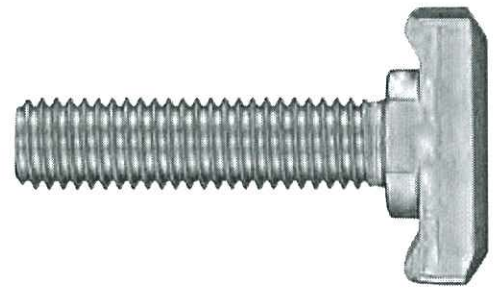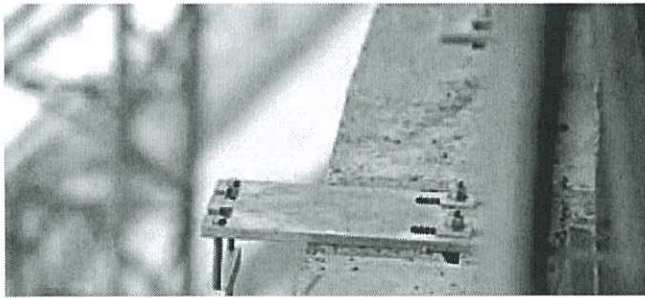

Applications

- For use with HAC-40 to HAC-70 anchor channels

Advantages

- Simplification of portfolio. Only one universal bolt type needed to cover HAC-40 to HAC-70 anchor channel
- European Approval according to latest technical specifications
- Dust-free and noiseless fastening method

Technical data

HBC-C	
For use with	HAC-40 to HAC-70 anchor channels
Required setting tool	Torque wrench
Approvals	ETA-11/0006



HBC-C (Steel grade 8.8, Hot dip galvanized 45 µm)

Thread diameter	Thread length	Thickness fastened - max	Material composition	Package (pcs)	Order designation	Item Number
12 mm	40 mm	15 mm	Steel grade 8.8	100 pc	T-head bolt HBC-C M12x40 8.8F	434401
12 mm	50 mm	25 mm	Steel grade 8.8	100 pc	T-head bolt HBC-C M12x50 8.8F	434402
12 mm	60 mm	35 mm	Steel grade 8.8	100 pc	T-head bolt HBC-C M12x60 8.8F	434403
16 mm	50 mm	20 mm	Steel grade 8.8	100 pc	T-head bolt HBC-C M16x50 8.8F	434404
16 mm	60 mm	30 mm	Steel grade 8.8	100 pc	T-head bolt HBC-C M16x60 8.8F	434405
16 mm	80 mm	50 mm	Steel grade 8.8	50 pc	T-head bolt HBC-C M16x80 8.8F	434406
16 mm	100 mm	70 mm	Steel grade 8.8	50 pc	T-head bolt HBC-C M16x100 8.8F	434407 ★
20 mm	60 mm	25 mm	Steel grade 8.8	50 pc	T-head bolt HBC-C M20x60 8.8F	434408 ★
20 mm	100 mm	65 mm	Steel grade 8.8	50 pc	T-head bolt HBC-C M20x100 8.8F	434409
20 mm	125 mm	90 mm	Steel grade 8.8	25 pc	T-head bolt HBC-C M20x125 8.8F	434410 ★
20 mm	150 mm	115 mm	Steel grade 8.8	25 pc	T-head bolt HBC-C M20x150 8.8F	434411 ★

★ Special Request