



工程指示 / 要求簡簽(E.I.)

工程指示編號: EI/4573 / 22

修改版次:

工程編號: J-853

工程名稱: 大窩坪(延坪路)

工程項目: 試水箱玻璃(廠用)

收件人: Maggie

發件人: 大明

日期: 12/04/2022

要求提供 / 確認 事項:

() 初步鋁料 B.M. () 加工折圖, 然後生產 () 尺寸表

() 正式鋁料 B.M. () 技術上資料 / 指示 () 報

() 配件 B.M. () 樣辦或貨品說明書 () 分判合約

() 其他: _____

內容:

煩請依附件資料生產玻璃後送廠加工

不需要做熱浸處理

請在 _____ ASAP _____ 前完成上列要求。

附有關圖紙 / 文件: 附 B.M 表 1 頁, 圖紙 5+2 頁

以上項目為:

原合約工程包

原合約工程加 / 減賬

新工程報價

原因: -

分發東莞各部門:

謝永材

() 生產技術總監 連附件 () 技術部 連附件 () 生產部 連附件 () 機械設計部 連附件

() 採購部 連附件 () 生產統籌部 連附件

楊

() 質檢部 連附件 () 會計部 連附件 () 報關組 連附件 () 其他 _____ 連附件

分發香港各部門:

() 行政部 連附件 () 會計部 連附件 () 統籌部 連附件 () 工程部地盤科文 連附件

() 採購部 連附件 () QS 部 連附件 () 維修部 連附件 () 其他 _____ 連附件


傳遞編號: AK 0602

發件人簽署:

6

項目經理簽署:

Project

 美特鋁質 有限公司 MIDI Aluminum Fabricator Ltd	工程號:	J853	計算:	謝永林	日期:	2022.04.11	送呈:	胡哥	計算參考數值/ 所屬位置分格
	地盤名稱:	九龍延坪道	核對:	謝永林	日期:	2022.04.12	副本:		
	項目類別:		批准:				A/C Code:	EU4295H版新修改	
BM編號:	修改版次:			總計玻璃面積 (平方米):		32.074			

序號	修改內容	玻璃圖號	顏色與類型	厚度 (mm)	玻璃尺寸		數量 (塊)	總面積 (平方米)	使用位置	加工參考	分屬類型	分格1	分格高度	備註
					寬度 (W mm)	高度 (H mm)								
1		G1-P114 ✓	G1 ✓	34	2068.5	2487.0 ✓	2 ✓	10.289 ✓	PMU	G1	梗窗 ✓	2102.5	2542.5	
2		G1-P103	G1	34	1966.0	2487.0	2	9.779	PMU	G1	梗窗	2000.0	2542.5	
3		G1-P13 ✓	G1 ✓	34	666.0 ✓	657.0 ✓	2 ✓	0.875 ✓	PMU	G1	梗窗	700.0	712.5	
4		G2-P13 ✓	G2 ✓	32	638.0 ✓	1777.0 ✓	2 ✓	2.267 ✓	PMU	G2	SHL	700.0	1830.0	
5		G4-P114 ✓	G4 ✓	12	2068.5	903.0	2	3.736	PMU	G4	梗窗	2102.5	957.5	
6		G4-P13 ✓	G4 ✓	12	666.0	903.0	2	1.203	PMU	G4	梗窗	700.0	957.5	
7		G4-P103 ✓	G4 ✓	12	1966.0	903.0	2	3.551	PMU	G4	梗窗	2000.0	957.5	
8		G5-P13 ✓	G5 ✓	12	630.0	297.5	2	0.375	PMU	G5	欄河	700.0	297.5	
						合計	16	32.074						

(1).本表中玻璃採用廣東海控特種玻璃技術有限公司，樣板代號亦為三鑫產品代號。

2).本表中所有玻璃對角線尺寸偏差要求不超過負2mm。

3).本表中玻璃要求粗磨邊處理並倒棱角，欄河玻璃頂底要精磨邊，而所有玻璃之入爐方向需保持一致。

4).本表中所有玻璃成品均需做雙面保護，用透明靜電膠紙加四周一寸半白膠紙做雙面加固保護處理。

5).本表中所有玻璃成品均需注明室內外及其玻璃編號/使用位置/樓層，以便識別。

(G1) 10mm (Heat Strengthened)+12mm Air +12mm (Tempered) IGU (10mm FDNB0-54T#2 + 12A + 12mm Clear) Sample No. : D21031911

(G2) 10mm (Heat Strengthened)+12mm Air +10mm (Tempered) IGU (10mm FDNB0-54T#2 + 12A + 10mm Clear) Sample No. : D21031909




(G4) 12mm Clear (Heat Strengthened) with CST154 (12mm Clear #2 SSC-50T) Sample No. : D21032005

(G5) 12mm Clear Tempered Glass (12mm Clear) Sample No. : D21032007


加工注意事項




玻璃類型描述:

類別	美特鋁質有限公司 MIDI Aluminium Fabricator Ltd.	圖號 G1	物料號
修改日期	2022.3.10	數量 見BOM表	位置 見BOM表
批准	復核 謝永林	2022.4.12	
日期	2022.3.10		

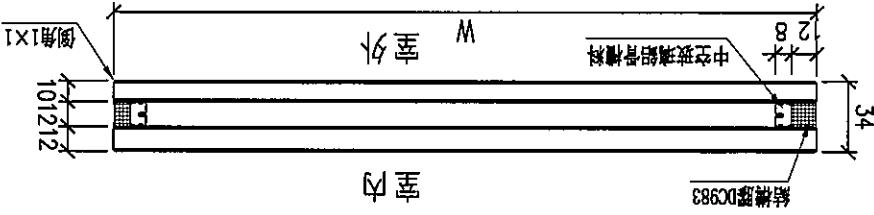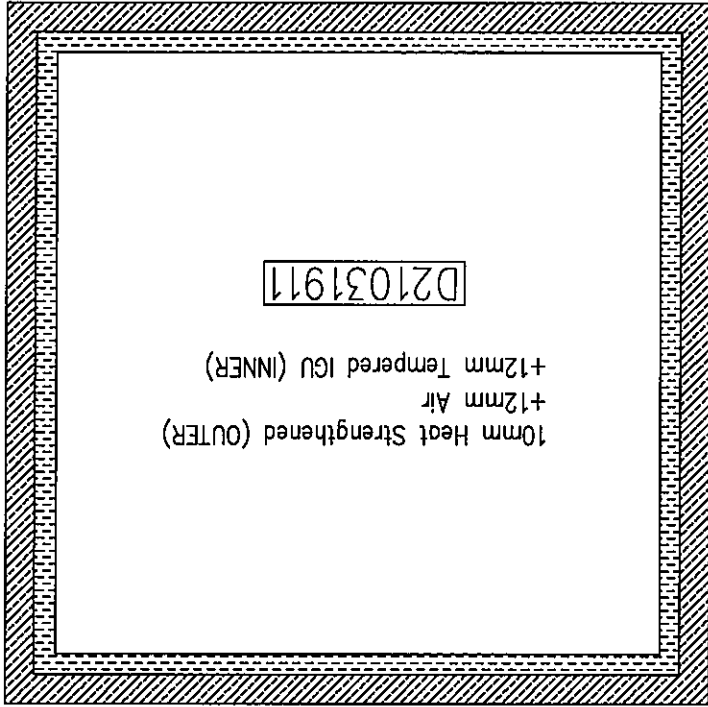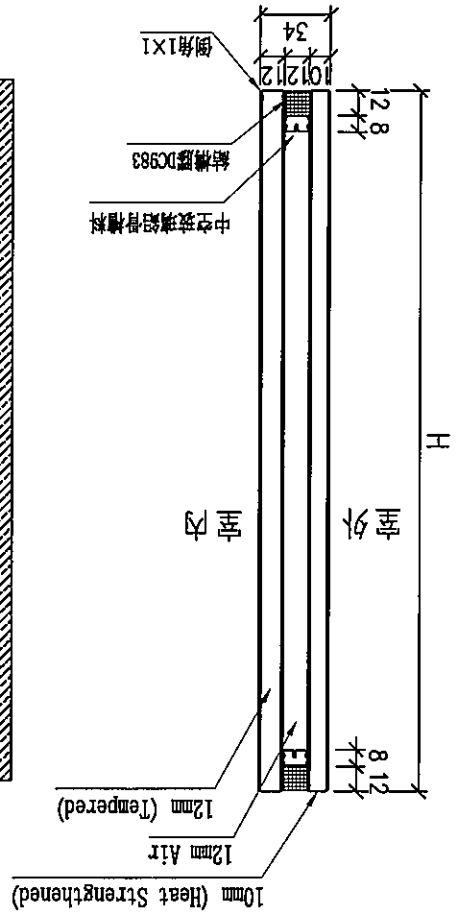

工程號 J-853	地盤 九龍延平道	名稱	玻璃加工圖 (大塊窗玻璃+小塊窗玻璃)	採用	
		材料	地盤	工廠	√
		顏色	10mm FDNB0-541#2+12A+12mm Clear		
		附件			


 MIDI Aluminium Fabricator Ltd. 美特鋁質有限公司	類別	物料號	
	制圖	圖號	數量
陳敏聰	2022.3.10	G2	位置
復核	2022.4.12	見BOM表	位置
謝永林		見BOM表	日期
批准			修改

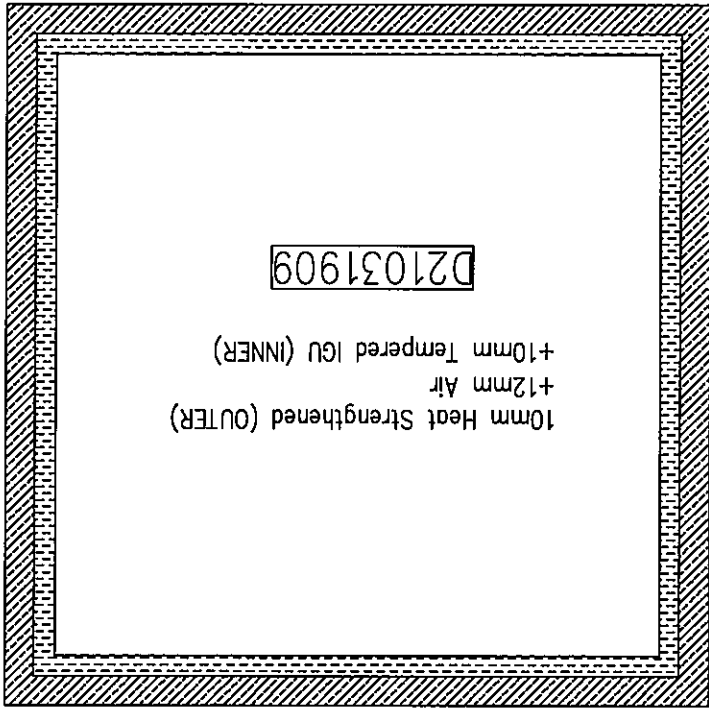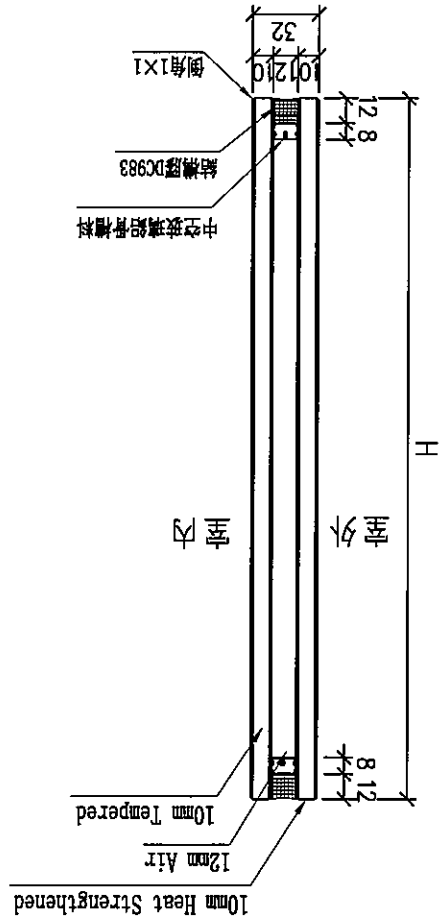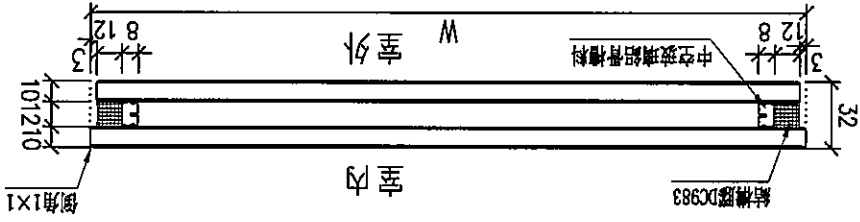

頂


工程號	U-853	地盤	九龍延坪道
	名稱		玻璃加工圖 (生窗玻璃)
	材料		地盤
	顏色		10mm FDNB0-54T#2+12A+10mm Clear
附件	工廠	✓	



類別	物料號	美特鋁質有限公司 MIDI Aluminium Fabricator Ltd.	
製圖	陳敏聰	2022.3.10	圖號 G4
復核	謝永林	2022.4.12	數量 見BOM表
批准			位置 見BOM表
日期			

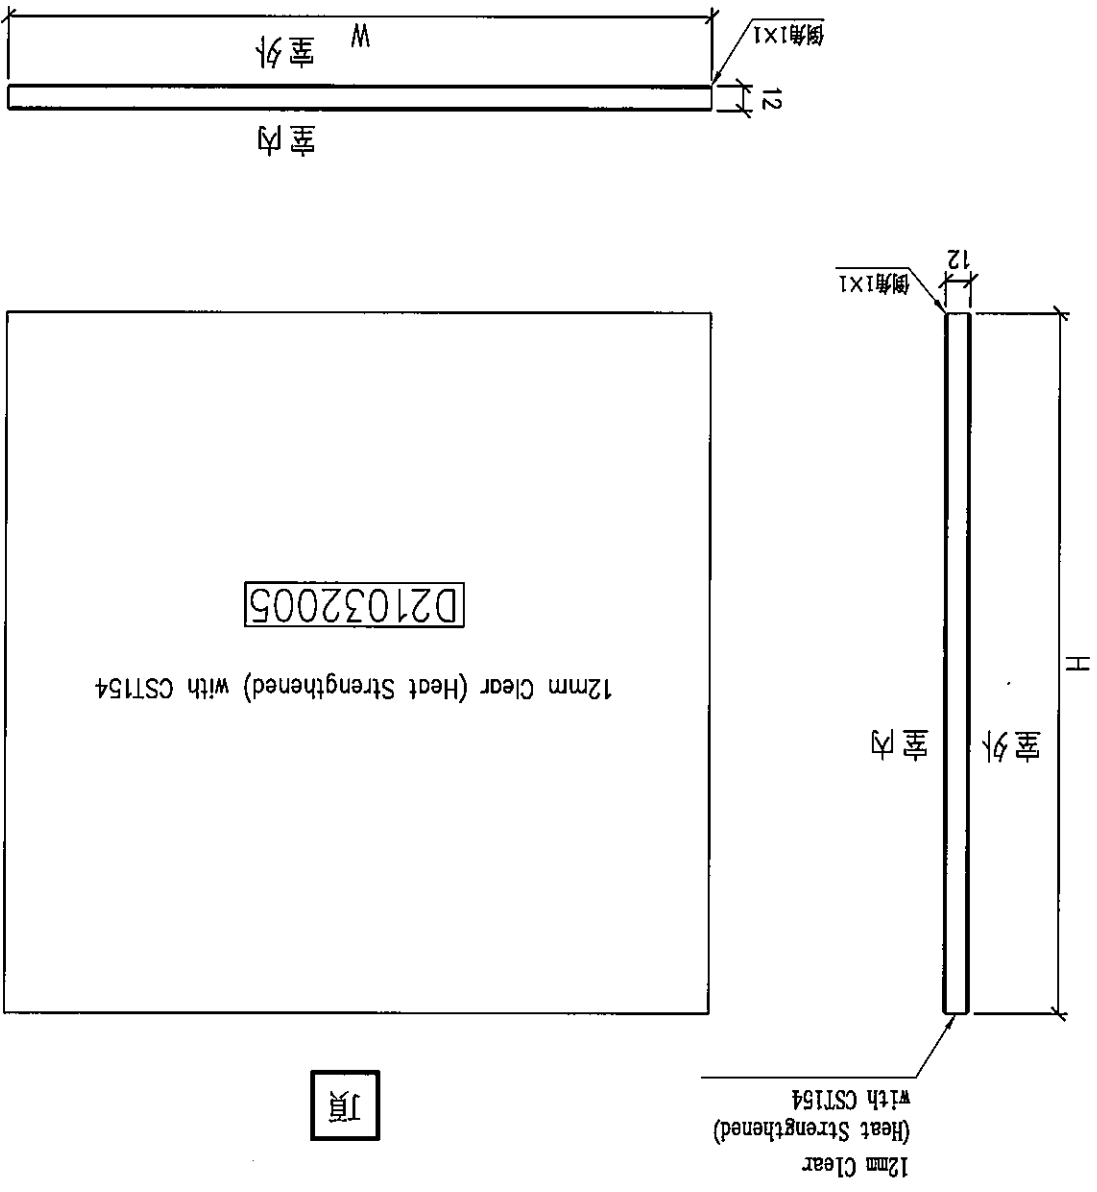

工程號	J-853	地盤	九龍延坪道
名稱	玻璃加工圖 (背板位玻璃)	採用	
材料	地盤		
顏色	12mm Clear #2 SSC-50T	工廠	√

附件


 MIDI Aluminium Fabricator Ltd. 美特鋁質有限公司	類別	物料號		
	製圖	陳敏聰	2022.3.10	圖號 G5
修改	日期	2022.4.12	數量	見BOM表
			位置	見BOM表

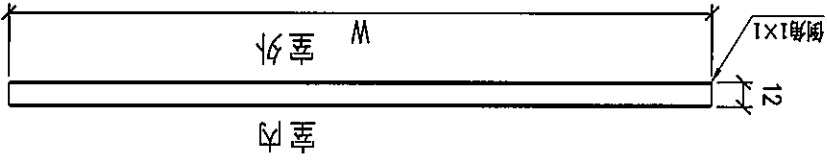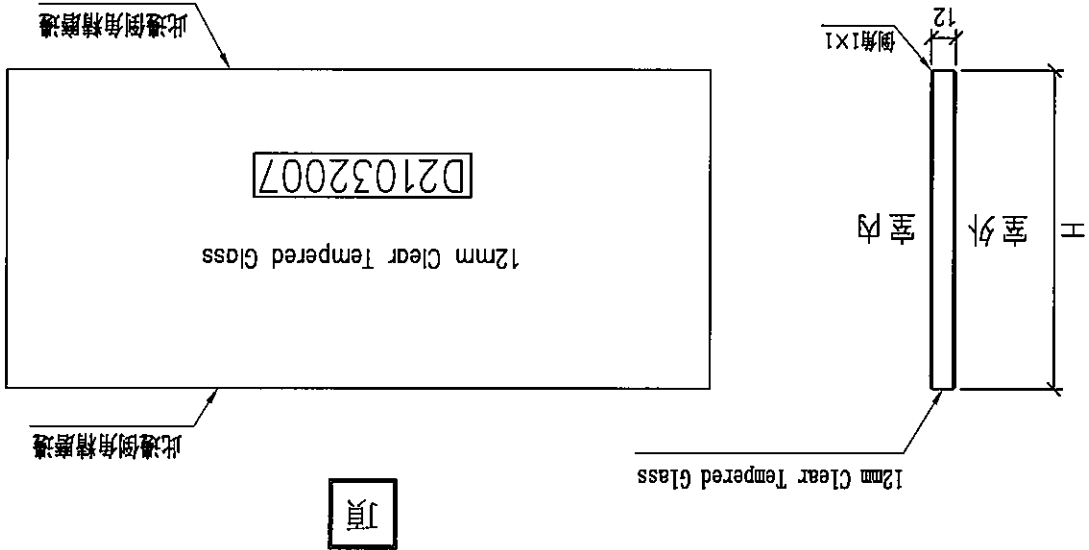

工程號	J-853	地盤	九龍延坪道
名稱	玻璃加工圖 (攔河玻璃)		
採	用		
地盤			
工廠	✓		
顏色	12mm Clear		

附件

PMU

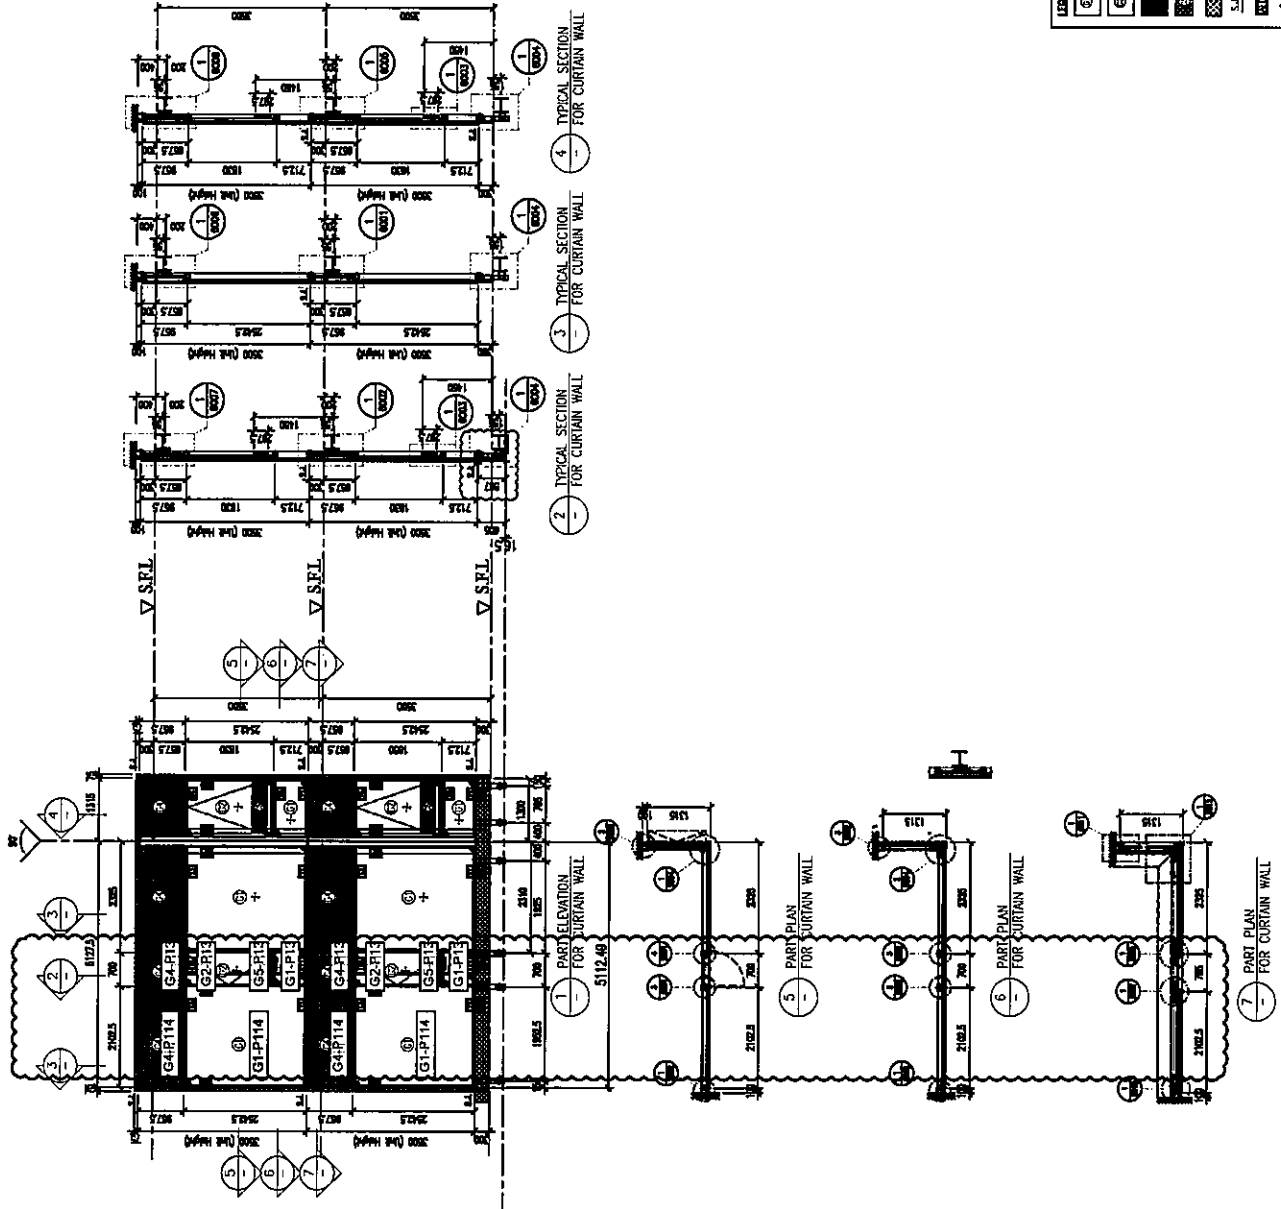

- LEGEND:**
- ① - 10mm BEAL STRENGTHENED GLASS (OUTER)
 - ② - 10mm AIR SPACE, 11mm THK. UNHEATED CLEAR GLASS (INNER)
 - ③ - 10mm BEAL STRENGTHENED GLASS (OUTER)
 - ④ - 10mm AIR SPACE, 11mm THK. UNHEATED CLEAR GLASS (INNER)
 - ⑤ - 12mm THK. HEAT STRENGTHENED GLASS & 2mm THK. ALUM. BACKSPAN (SPANDREL GLASS)
 - ⑥ - 12mm THK. CLEAR TINTED GLASS (INTERNAL PROTECTIVE BARRIER)
 - ⑦ - 3mm THK. ALUM. CLADDING
 - S.S.L. - STICK JOINT (FIND LOAD)
 - ALU - ALUM. EXTRUSION (BE. AL.)
 - ▲ - SUPPORT POINT (FIND LOAD + HEAD LOAD)
 - - SUPPORT POINT (FIND LOAD)

CLIENT: SHIMAO GROUP HOLDINGS LIMITED	ARCHITECT: SHIMAO GROUP HOLDINGS LIMITED	MAIN CONTRACTOR: 協興建築有限公司 HOP HING CONSTRUCTION CO LTD	STRUCTURAL ENGINEER: C M WONG & ASSOCIATES LTD 黃志明建築工程師有限公司	PROJECT CONSULTING: VENHARDT	NOTE: 1. DIMENSIONS ARE IN MM. 2. ALL DIMENSIONS ARE WORKING DIMENSIONS. 3. ALL DIMENSIONS TO BE CHECKED ON SITE BEFORE FABRICATION. LEGEND: ① - CENTER MARK NO. ② - REFER SHEET NO. 1. FFL - FINISHED FLOOR LEVEL. 2. S.F.L. - STRUCTURAL FLOOR LEVEL. 3. Ⓢ - FINISH LEVEL.
PROJECT: PROPOSED RESIDENTIAL DEVELOPMENT AT NO.111, B&42 YIN PING ROAD, HONGKONG					
TITLE: PART ELEVATION OF PERFORMANCE TEST FOR CURTAIN WALL					
DATE: 24-Nov-21 SCALE: 1:50 (A1)					
DRAWN BY: LUP CHECKED BY: -					
SHIMAO GROUP HOLDINGS LIMITED 111 Cheung Yin Ping Road, Kowloon TEL: (852) 27777944 FAX: (852) 27777944					

CLIENT: SHIMAO GROUP HOLDINGS LIMITED

ARCHITECT: HONG TUNG & PARTNERS LIMITED

MEIN-HARDT

STRUCTURAL ENGINEER: CMA CHONG & ASSOCIATES LTD

TRAFFIC CONSULTANT: MEIN-HARDT

NOTE:

1. ALL DIMENSIONS ARE IN mm
2. ALL ELEVATIONS ARE VIEWED FROM OUTSIDE
3. ALL DIMENSIONS TO BE VERIFIED ON SITE BEFORE ERECTION

LEGEND:

- ① - 12mm THK. HEAT INS. W/
- ② - 10mm THK. HEAT INS. W/
- ③ - 10mm THK. HEAT INS. W/
- ④ - 10mm THK. HEAT INS. W/
- ⑤ - 10mm THK. HEAT INS. W/
- ⑥ - 10mm THK. HEAT INS. W/
- ⑦ - 10mm THK. HEAT INS. W/
- ⑧ - 10mm THK. HEAT INS. W/
- ⑨ - 10mm THK. HEAT INS. W/
- ⑩ - 10mm THK. HEAT INS. W/
- ⑪ - 10mm THK. HEAT INS. W/
- ⑫ - 10mm THK. HEAT INS. W/
- ⑬ - 10mm THK. HEAT INS. W/
- ⑭ - 10mm THK. HEAT INS. W/
- ⑮ - 10mm THK. HEAT INS. W/
- ⑯ - 10mm THK. HEAT INS. W/
- ⑰ - 10mm THK. HEAT INS. W/
- ⑱ - 10mm THK. HEAT INS. W/
- ⑲ - 10mm THK. HEAT INS. W/
- ⑳ - 10mm THK. HEAT INS. W/
- ㉑ - 10mm THK. HEAT INS. W/
- ㉒ - 10mm THK. HEAT INS. W/
- ㉓ - 10mm THK. HEAT INS. W/
- ㉔ - 10mm THK. HEAT INS. W/
- ㉕ - 10mm THK. HEAT INS. W/
- ㉖ - 10mm THK. HEAT INS. W/
- ㉗ - 10mm THK. HEAT INS. W/
- ㉘ - 10mm THK. HEAT INS. W/
- ㉙ - 10mm THK. HEAT INS. W/
- ㉚ - 10mm THK. HEAT INS. W/
- ㉛ - 10mm THK. HEAT INS. W/
- ㉜ - 10mm THK. HEAT INS. W/
- ㉝ - 10mm THK. HEAT INS. W/
- ㉞ - 10mm THK. HEAT INS. W/
- ㉟ - 10mm THK. HEAT INS. W/
- ㊱ - 10mm THK. HEAT INS. W/
- ㊲ - 10mm THK. HEAT INS. W/
- ㊳ - 10mm THK. HEAT INS. W/
- ㊴ - 10mm THK. HEAT INS. W/
- ㊵ - 10mm THK. HEAT INS. W/
- ㊶ - 10mm THK. HEAT INS. W/
- ㊷ - 10mm THK. HEAT INS. W/
- ㊸ - 10mm THK. HEAT INS. W/
- ㊹ - 10mm THK. HEAT INS. W/
- ㊺ - 10mm THK. HEAT INS. W/
- ㊻ - 10mm THK. HEAT INS. W/
- ㊼ - 10mm THK. HEAT INS. W/
- ㊽ - 10mm THK. HEAT INS. W/
- ㊾ - 10mm THK. HEAT INS. W/
- ㊿ - 10mm THK. HEAT INS. W/

PROJECT: PROPOSED RESIDENTIAL DEVELOPMENT AT Nos. 11, 15 & 17, HING ROAD, HONGKONG

TITLE: PART ELEVATION OF PERFORMANCE TEST FOR CURTAIN WALL

DATE: 24-10-2017 SCALE: 1:50 (A1)

DESIGNER: LHM CHECKED BY: -


CLIENT: SHIMAO GROUP HOLDINGS LIMITED

ARCHITECT: HONG TUNG & PARTNERS LIMITED


MEIN-HARDT

STRUCTURAL ENGINEER: CMA CHONG & ASSOCIATES LTD

TRAFFIC CONSULTANT: MEIN-HARDT

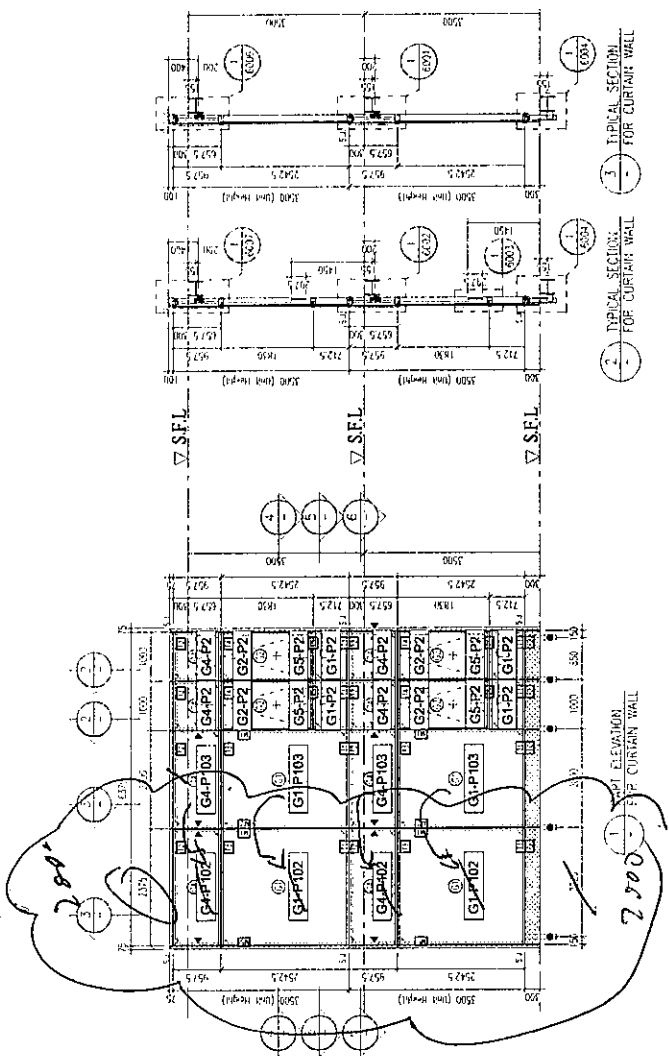


1. TYPICAL SECTION FOR CURTAIN WALL




2. TYPICAL SECTION FOR CURTAIN WALL

TEST CHAMBER 2



3. TYPICAL SECTION FOR CURTAIN WALL



4. TYPICAL SECTION FOR CURTAIN WALL

LEGEND:

- ① 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ② 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ③ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ④ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ⑤ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ⑥ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ⑦ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ⑧ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ⑨ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ⑩ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ⑪ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ⑫ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ⑬ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ⑭ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ⑮ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ⑯ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ⑰ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ⑱ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ⑲ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ⑳ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㉑ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㉒ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㉓ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㉔ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㉕ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㉖ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㉗ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㉘ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㉙ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㉚ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㉛ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㉜ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㉝ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㉞ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㉟ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㊱ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㊲ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㊳ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㊴ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㊵ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㊶ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㊷ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㊸ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㊹ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㊺ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㊻ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㊼ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㊽ 12mm THK. HEAT STRENGTHENED GLASS (INNER)
- ㊾ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)
- ㊿ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

① 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

② 12mm THK. HEAT STRENGTHENED GLASS (INNER)

③ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

④ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

⑤ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

⑥ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

⑦ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

⑧ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

⑨ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

⑩ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

⑪ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

⑫ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

⑬ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

⑭ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

⑮ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

⑯ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

⑰ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

⑱ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

⑲ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

⑳ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㉑ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㉒ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㉓ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㉔ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㉕ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㉖ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㉗ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㉘ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㉙ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㉚ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㉛ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㉜ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㉝ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㉞ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㉟ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㊱ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㊲ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㊳ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㊴ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㊵ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㊶ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㊷ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㊸ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㊹ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㊺ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㊻ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㊼ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㊽ 12mm THK. HEAT STRENGTHENED GLASS (INNER)

㊾ 12mm THK. HEAT STRENGTHENED GLASS (OUTER)

㊿ 12mm THK. HEAT STRENGTHENED GLASS (INNER)