



工程指示 / 要求簡箋(E.I.)

工程指示編號：EI / 6065/23

修改版次：-

工程編號：J - 858

工程名稱：將軍澳日出康城 11

工程項目：幕牆 保護瓦坑板 (3mm 加硬 +防 UV) 30 件 地盆用

收件人：生統

發件人：Ant Yeung

日期：20/04/2023

要求提供 / 確認 事項：  
內容：

因應保護嚴重脫落(已給業主強烈投訴)，  
需要出貨瓦坑板 (3mm 加硬 +防 UV) 30 件 3x1.5M 送地盆。  
現場補做保護

請在 2023.04.22 前完成上列要求。

分發東莞各部門：

( ) 生產技術總監 連附件 ( ) 技術部 連附件 ( ) 生產部 連附件 ( ) 機械設計部 連附件  
( ) 採購部 連附件 (✓) 生產統籌部 連附件 (✓) 小羅&清 連附件  
( ) 質檢部 連附件 ( ) 會計部 連附件 ( ) 報關組 連附件 ( ) 其他 \_\_\_\_\_ 連附件

分發香港各部門：

( ) 行政部 連附件 ( ) 會計部 連附件 ( ) 統籌部 連附件 ( ) 地盤科文 \_\_\_\_\_ 連附件 積哥  
( ) 採購部 連附件 ( ) QS 部 連附件 ( ) 維修部 連附件 ( ) 其他 \_\_\_\_\_ 連附件

傳遞編號：

HK 812/23

發件人簽署：


項目經理簽署：

## 5 Glass Visual Inspection

Complied to ASTM C1036

- 1m apart from glass panel (3<sup>rd</sup> party inspector standard)
- Inspection frequency


## 6 Protect Method for Curtain Wall Unit

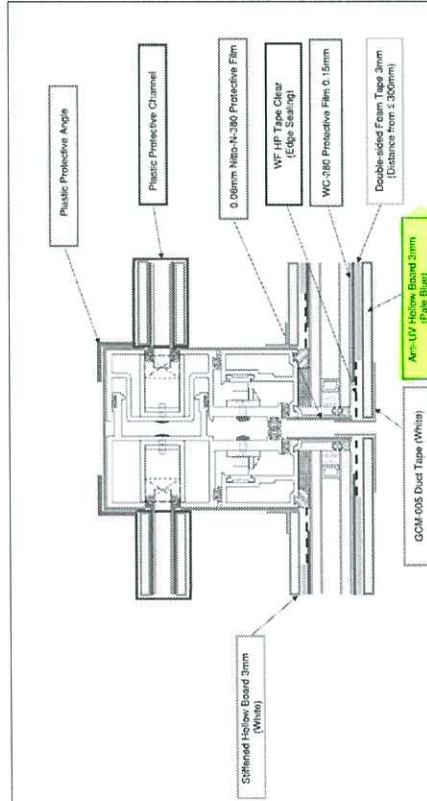

Protect Method for curtain wall (Plan)

- Reason: Proper protection for curtain wall shall be provided
- Demonstration: Random
- Criteria: Protective method shall be followed as shown, appearance of the protection for each panel shall be aligned

家規

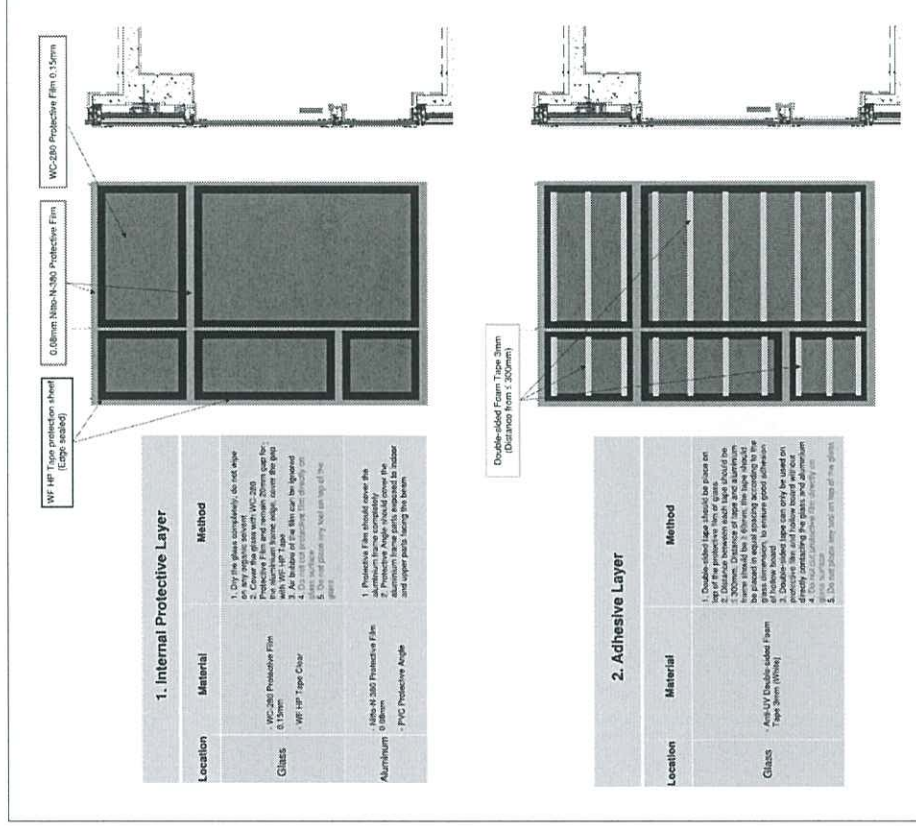

Protect Method for Curtain Wall (Internal Protective Layer and Adhesive Layer)

- Reason: Proper protection for curtain wall shall be provided
- Demonstration: Random
- Criteria: Protective method shall be followed as shown, appearance of the protection for each panel shall be aligned

## Minimum Requirement for Glass Protection

1. The façade contractor shall provide glass protection which include the following materials with the corresponding characteristics:

### 1.1 Basic Glass Protection Film (For both Outside and Inside)

#### a. Surface Protection:

- The Basic Glass Protection Film shall provide protection on the glass panel and no stains shall be left on the glass surface after removal of the protection film.
- The Basic Glass Protection Film shall not be dissolved on glass panel under long term exposure to sunlight.

### 1.2A Air Bags (For Outside Only)

#### a. Impact Resistant:

- The Air Bag shall protect the glass from being hit and damaged by hard and sharp materials, including bamboo, cement debris, tiles, metal fragments, etc.

### 1.2B Corrugated plastic sheet (For Inside Only)

#### a. Impact Resistant:

- Minimum thickness of the Corrugated Plastic Sheet shall be 5mm.
- The Corrugated Plastic Sheet shall protect the glass from being hit and damaged by hard and sharp materials, including bamboo, cement debris, tiles, metal fragments, etc.

### 1.3 Exterior Protection Film (For both Outside and Inside)

#### a. Heat Resistant and Thermal Insulated:

- The Exterior Protection Film shall remain adhesive and function properly (including not to peel off, be dissolved, and form air bubbles between the glass surface and the film).
- The Exterior Protection Film shall protect the glass surface from being damaged by weld spatter during construction stage.

#### b. UV Resistant:

- The Exterior Protection Film shall not be dissolved on glass panel under long term exposure to sunlight.
- There shall be no stains left on the glass surface after removal of the Exterior Protection Film.

#### c. Scratch resistant:

- The Exterior Protection Film shall protect the glass surface from being scratched and damaged during transportation and installation.


### 1.4 Plastic adhesive tape (For both Outside and Inside)


#### a. UV Resistant:

- The Adhesive Tape shall not be dissolved on glass panel under long term exposure to sunlight.
- There shall be no stains left on the glass surface after removal of the Adhesive Tape.
- The Adhesive Tape shall be replaced by a new plastic adhesive tape for every period of 12 months.
- 

合約

# J858 日出康城11期单元件包装指示示意图-2

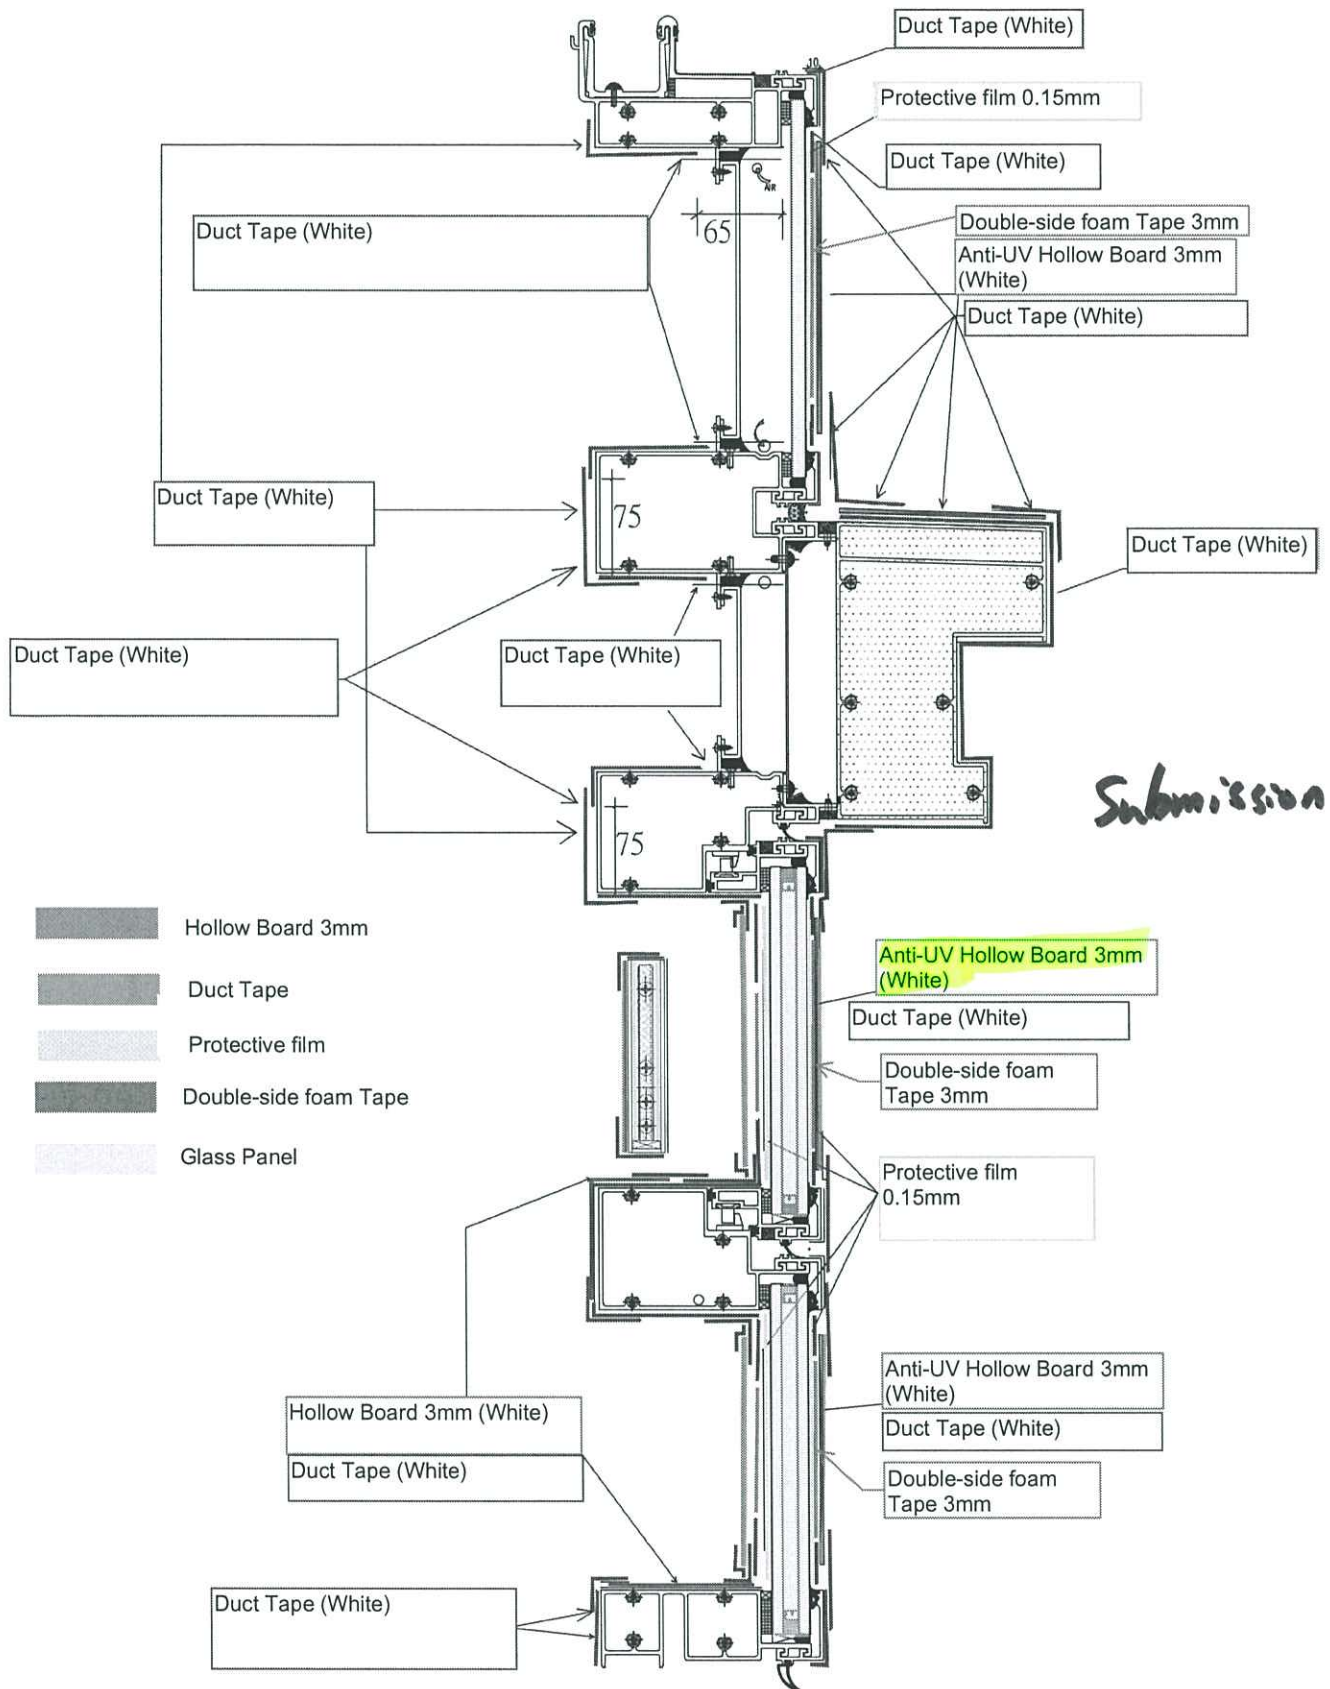

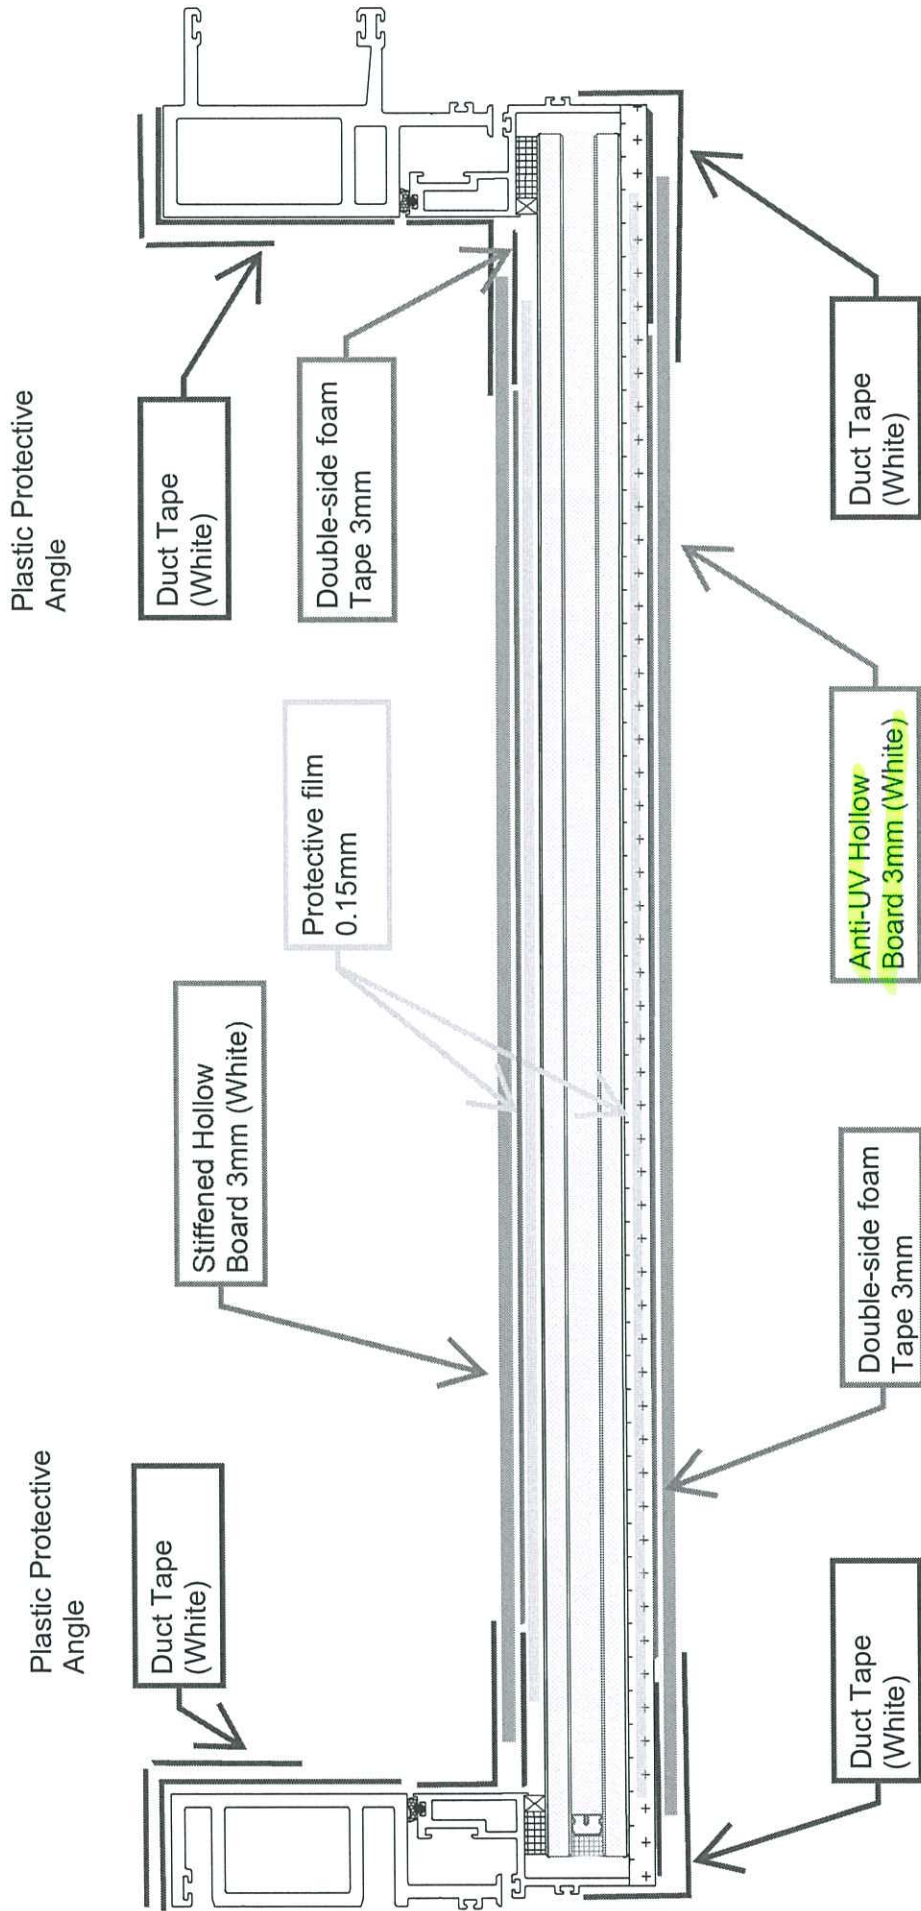

Plastic Protective Angle

Plastic Protective Angle

Duct Tape (White)

Double-side foam Tape 3mm

Protective film 0.15mm

Stiffened Hollow Board 3mm (White)

Duct Tape (White)

Anti-UV Hollow Board 3mm (White)


Double-side foam Tape 3mm


Duct Tape (White)

- Plastic Protective Angle
- Hollow Board 3mm
- Duct Tape
- Protective film
- Double-side foam Tape
- Glass Panel





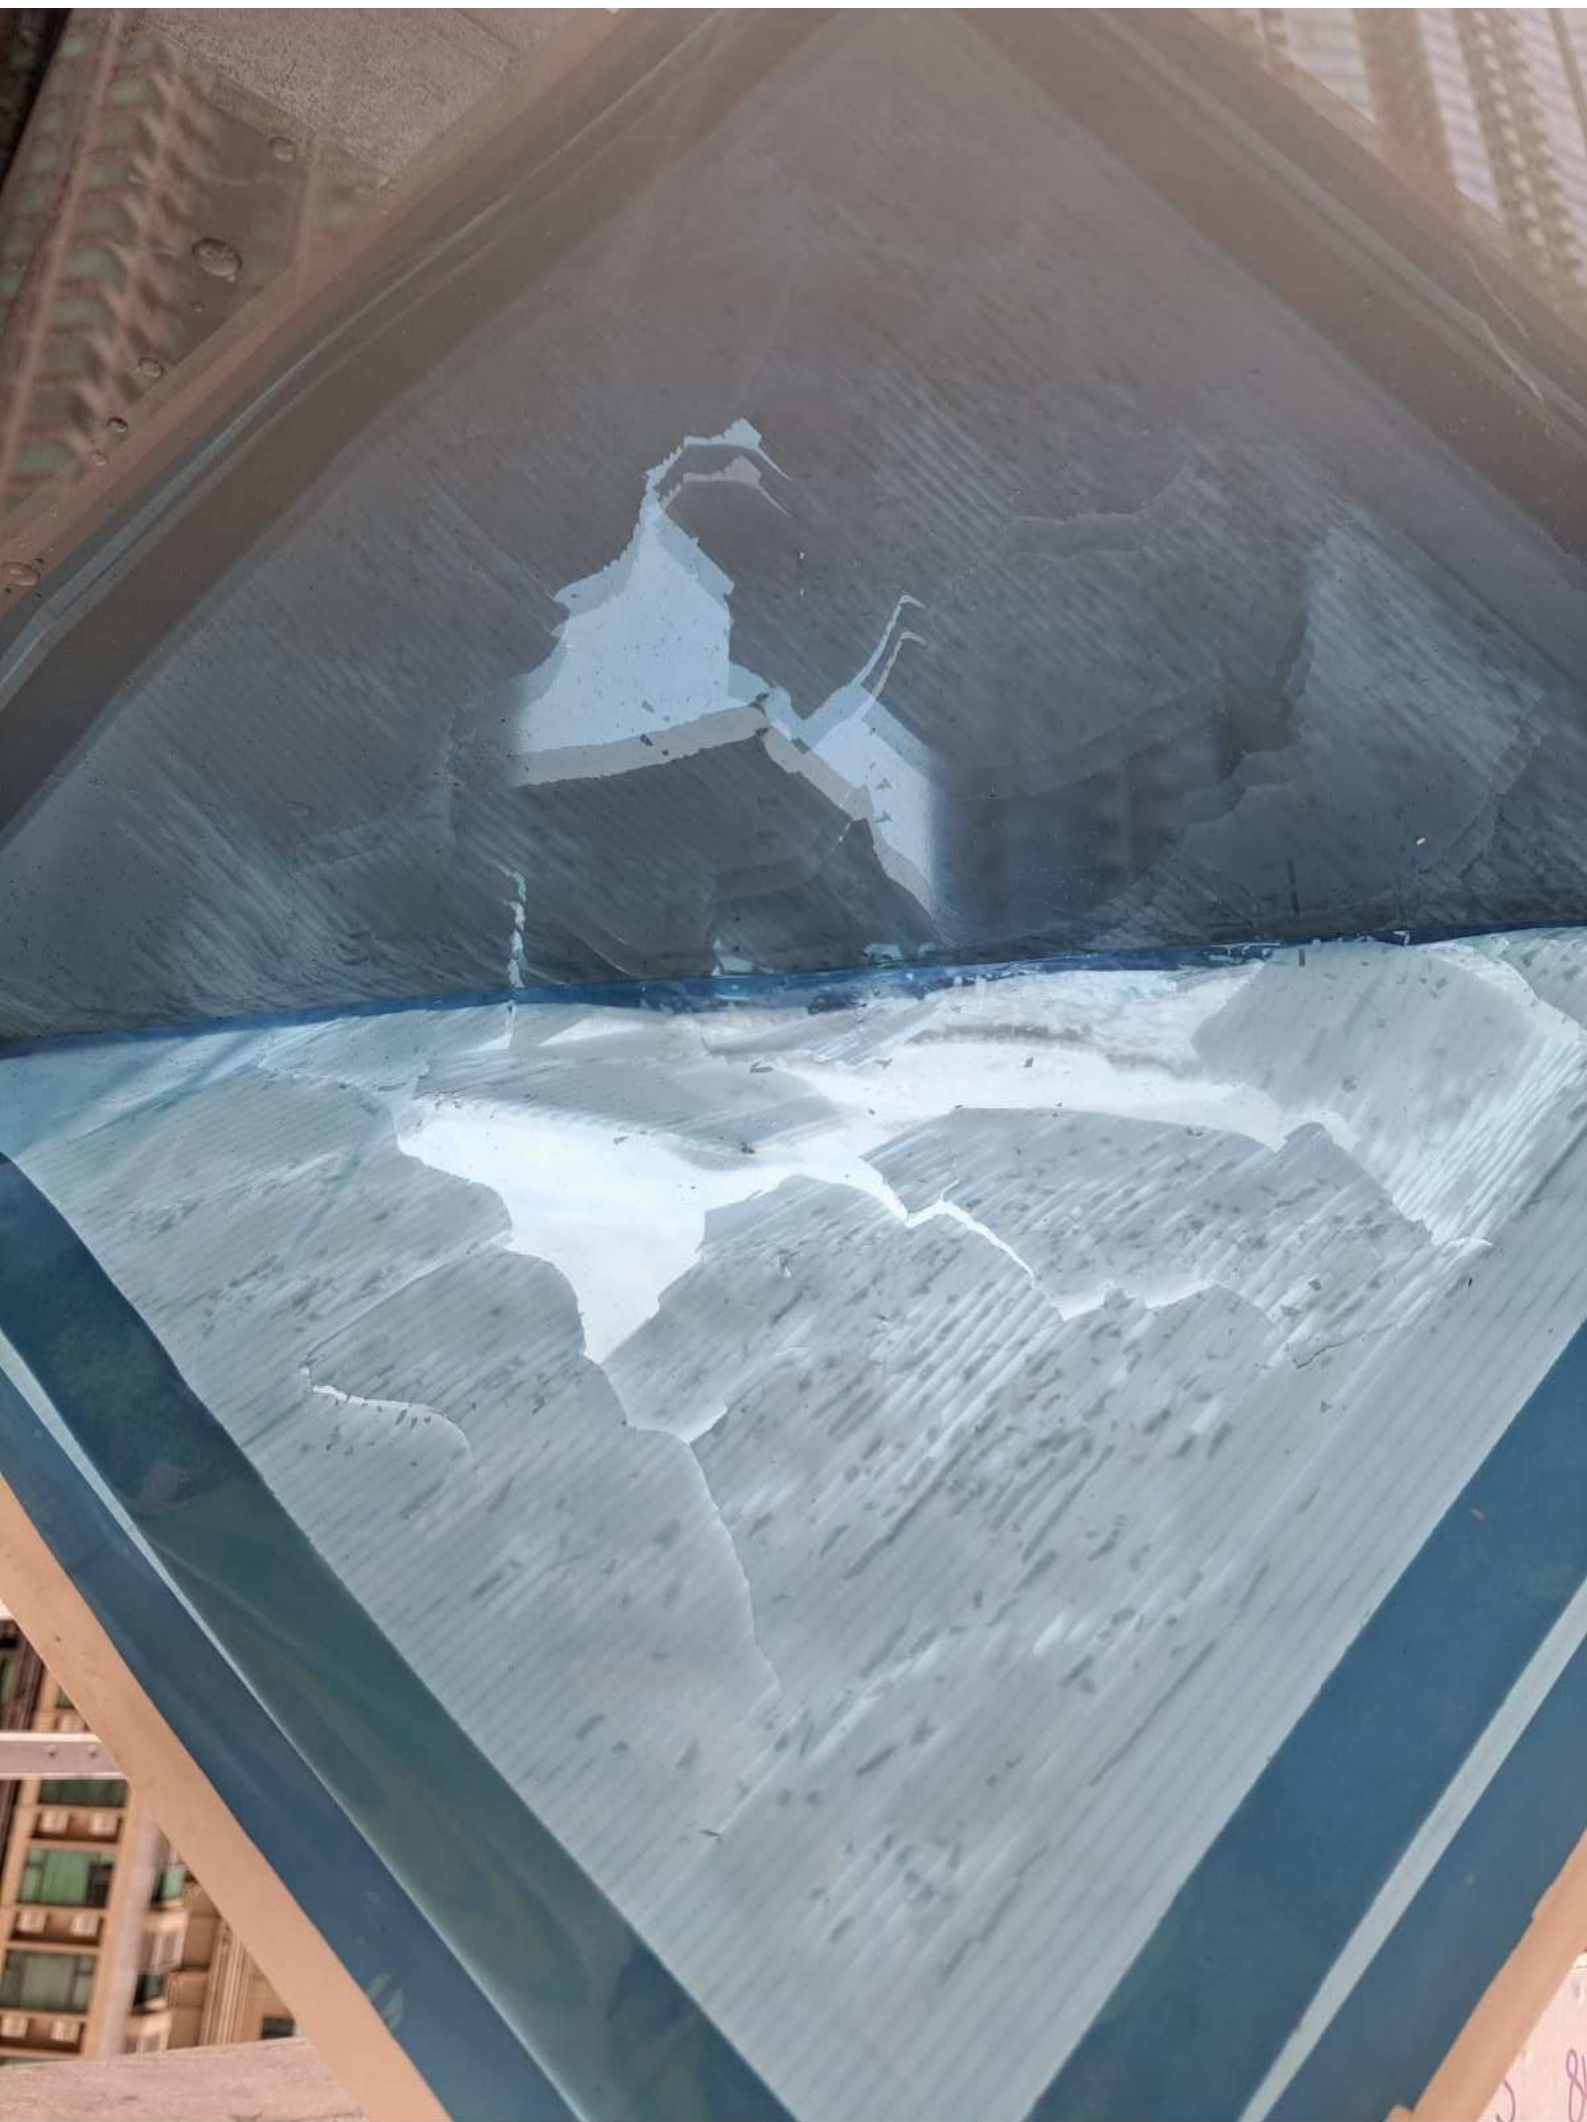

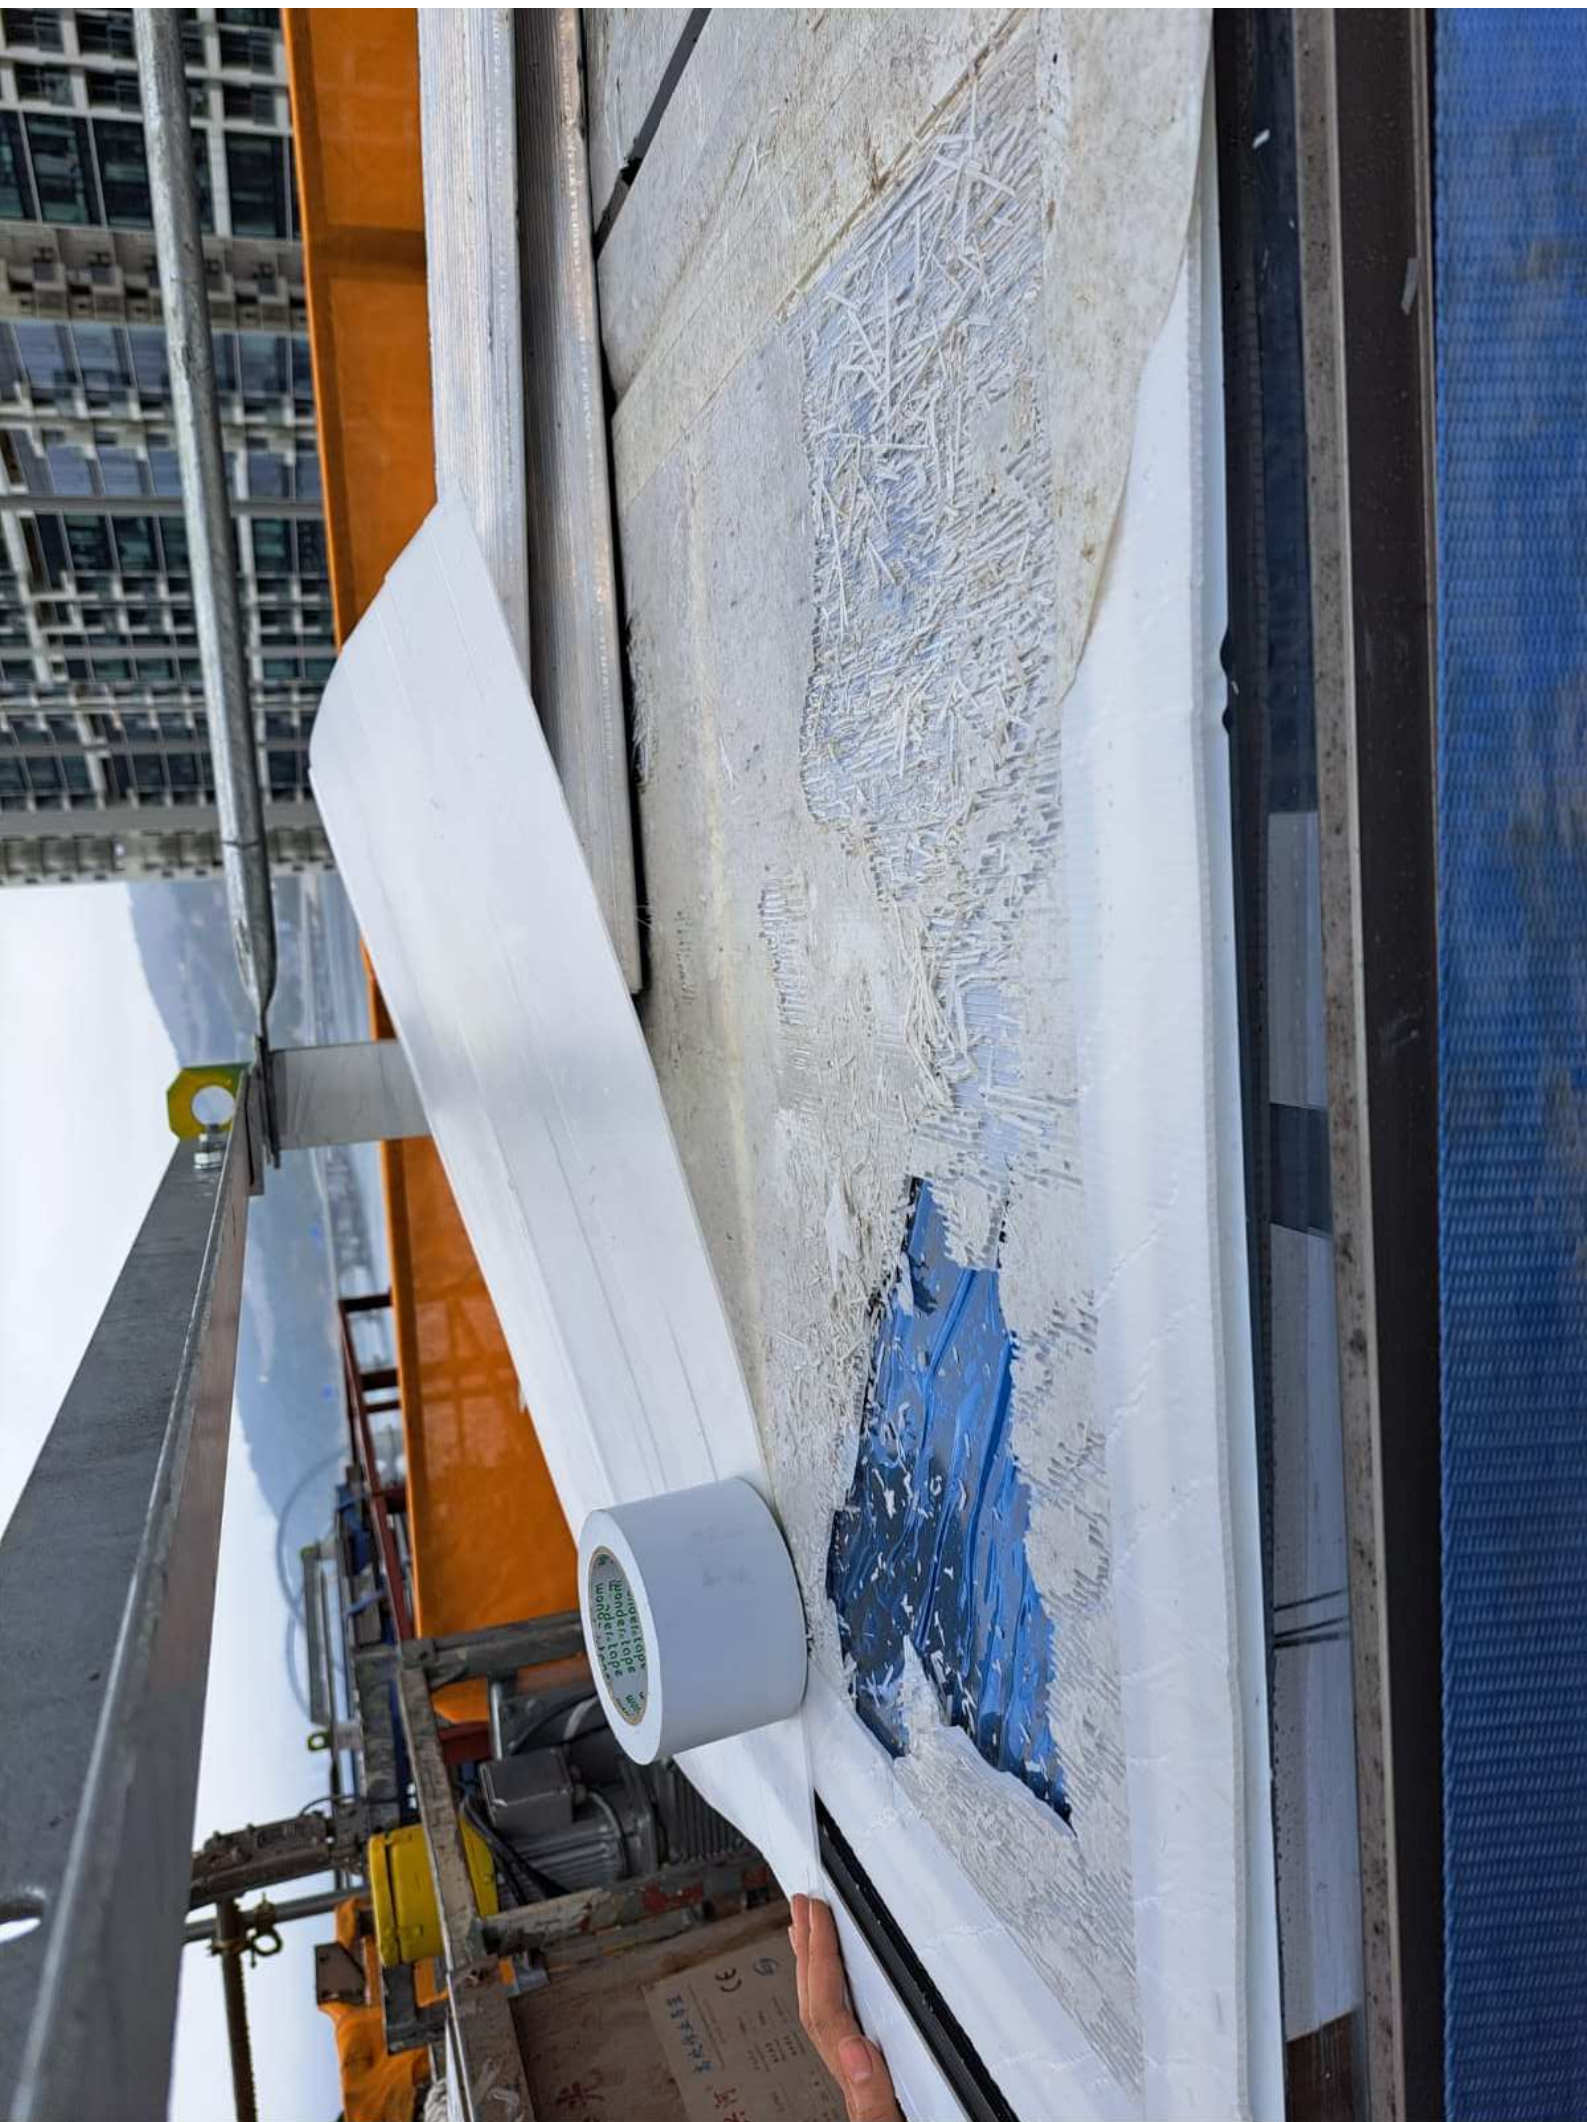

Lifting Frame T-18 S.W.T. 27

Lifting Frame T-19 S.W.T ZT